



## WATER CONSERVATION

### Water Conserving

**1.28 GPF**

**Battery Powered Flush Valve (Closet)**

**Model**

**HB8-128 (Bat)**

➤ **Description**

Battery Powered, Sensor Operated, Exposed, **Water Conserving**, Closet Flush Valve for floor mounted or wall hung top spud bowls.

➤ **Flush Cycle**

- **Model HB8-128 (Bat)**  
Battery Powered (1.28 GPF)

**Note:** Flush Valves may not function with all bowls. Be sure to verify flow requirements with bowl manufacturer.


➤ **Specifications**

Exposed, Piston Operated, Chrome Plated, Closet Flush Valve with the following features:


- Standard Brass/Chrome Plated All Metal Construction
- Superior, Slow-Closing, Piston Flushing Mechanism
- Standard Manual - Mechanical Override Button
- Field adjustable to Left or Right Rough-In
- Operating Pressures: 10 – 125 PSI
- Standard Self-Cleaning Filtering System
- Superior VSI Silicone Elastomer Piston Seals are Unaffected by Chlorine, Chloramines and Ammonia.
- ADA Compliant - Infrared Sensor operated for "No Hands" operation
- Reliable, Latching Solenoid Valve
- Preset / adjustable Sensor Distance
- Adjustable Tailpiece
- 1" I.P.S. Angle Stop Valve with vandal resistant cap
- High Back Pressure Vacuum Breaker / Flush Tube Connection
- Spud Coupling and Flange for 1-1/2" Top Spud
- Sweat Solder Adapter with Cover Tube and Wall Flange
- High Copper, Low Zinc Brass Casting for Dezincification Resistance
- 24 hour Sentinel Flush
- (4) AA Alkaline Batteries - Furnished

➤ **Electrical Specifications:**

- Battery: (4) AA Alkaline Batteries
- Solenoid Valve and Sensor, 6V DC
- Battery Service Life: 400,000 Flushes, up to 4 years

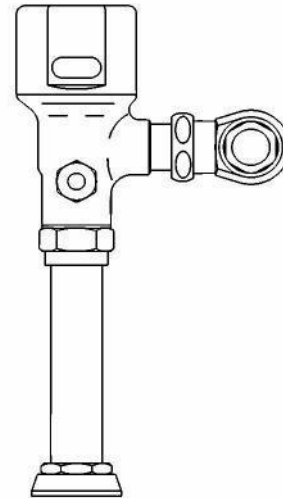

**Model HB8-128 (Bat)**

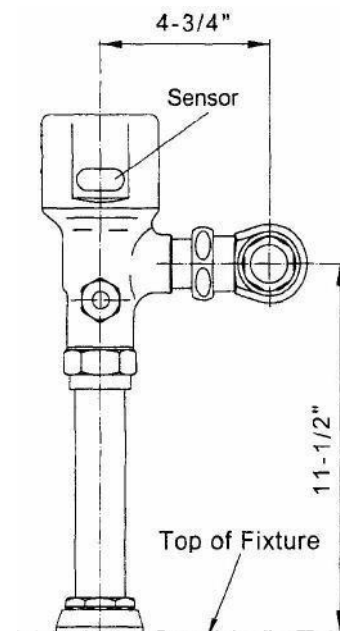

**HYDROTEK INTERNATIONAL, INC.**

**Phone: 800-922-9883**

**Fax: 866-670-5580**

**[www.hydrotekintl.com](http://www.hydrotekintl.com)**

