




ISO 9001 Certified

H8-D1T-05-WB/HB8-D1T-05-WB

0.5 GPF

Concealed Urinal/ Top Spud with Wall Box

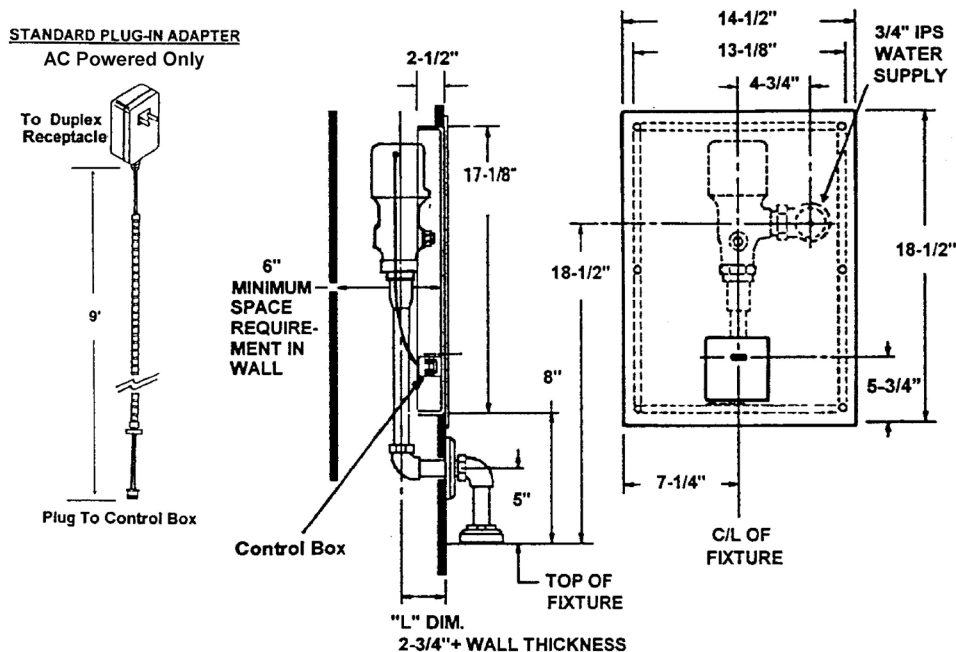

Description

This smooth and quiet concealed flush valve for urinal is equipped with adjustable sensor, rough brass finish, solenoid operator, adjustable tailpiece, vacuum breaker, $\frac{3}{4}$ " IPS Angle Stop, elbow flush connection, spud connection for $\frac{3}{4}$ " Top Spud. Exposed flush valve parts are chrome plated. Includes Stainless Steel Wall Box and Cover Plate.

Standard Package Includes

- (1) Flush Valve (Rough Brass Finish)
- (1) $\frac{3}{4}$ " Angle Stop Valve (Rough Brass Finish)
- (1) Sweat Solder Kit
- (1) Vacuum Breaker / Flush Tube
- (1) $\frac{3}{4}$ " Top Spud ELL Connection
- (1) Top Spud Coupling with Wall Flange
- (1) Electronic Control Box with Sensor
- (1) Plug-in Power Adapter (AC Powered)
- (4) AA Alkaline Batteries with Battery Holder (Battery Powered)
- (1) 13" X 17" Stainless Steel Wall Box with Cover Plate and Vandal Resistant Screws.

Optional Accessories (AC Powered)

- HC-010 Multi-unit power adapter. Powers up to 8 flush valve units up to 100 feet.
- Manual over-ride button

Plumbing Specifications

Model	Fixture	Supply	Spud	Flow Rate
H-8000C-D1T	Urinal	$\frac{3}{4}$ "	$\frac{3}{4}$ " Top	0.5 GPF
HB-8000C-D1T	Urinal	$\frac{3}{4}$ "	$\frac{3}{4}$ " Top	0.5 GPF

Electrical Specifications

- Control Circuit:
 - Solid State
 - Input: 12 VDC (AC), 6 VDC (Battery)
 - Output: 6 VDC
 - 3 second arming delay
 - 1 second flush delay
 - 36 hour sentinel flush
- Power Source (AC Powered):
 - Standard plug-in adapter with 9' output cord
 - Input: 120V AC, Output: 12V DC 800 mA
 - Class II, UL Listed
 - Optional multi-unit adapter
 - Input: 120V AC, Output: 12V DC 3A
 - Class II, UL Listed
- Power Source (Battery Powered):
 - (4) AA Alkaline Batteries

Wall Box Specifications

- Frame: 13" X 17" X 2" #15 Gauge 304 SS
- Cover Plate: 14 $\frac{1}{2}$ " X 18 $\frac{1}{2}$ " #14 Gauge 304 SS with #4 finish

HYDROTEK INTERNATIONAL, INC.
5055 Forsyth Commerce Rd., Ste 124
Orlando, FL 32807
800.922.9883 (Phone)
866.670.5580 (Fax)
www.hydrotekintl.com

